

HIAB Mounted Crane **F290A**
















34 t





3b

crane hire

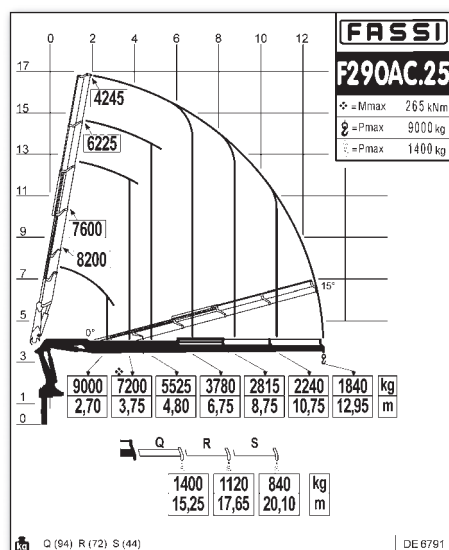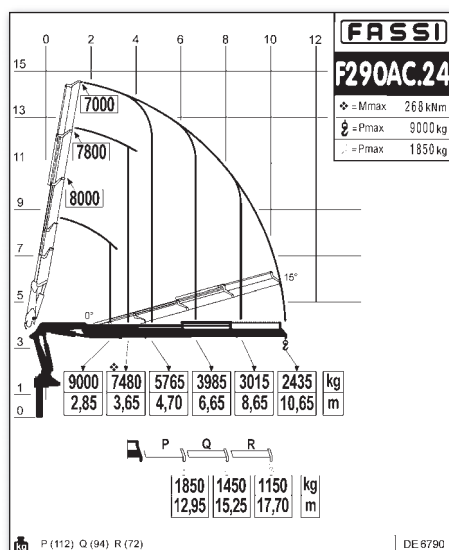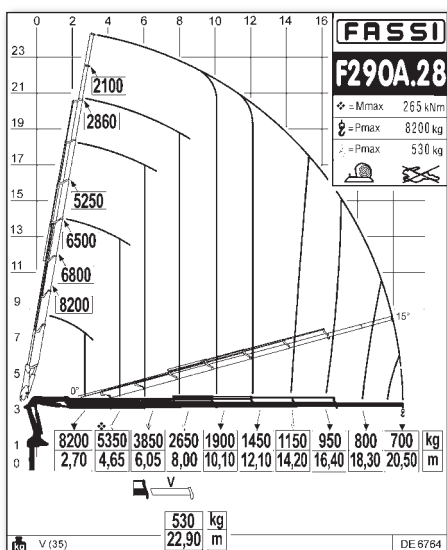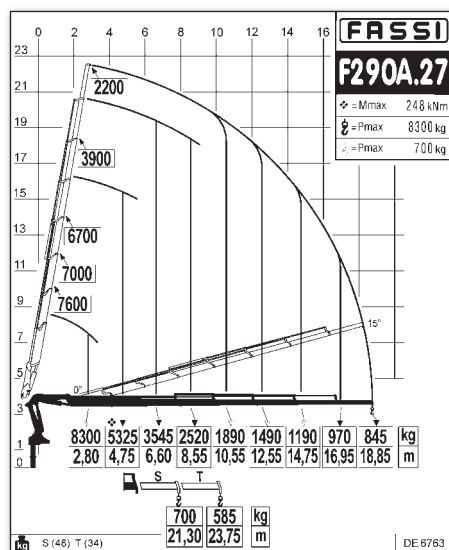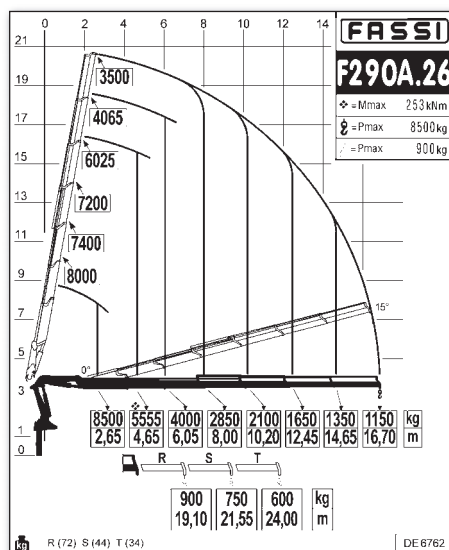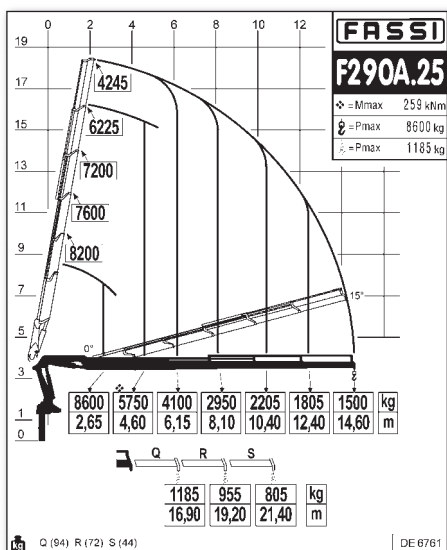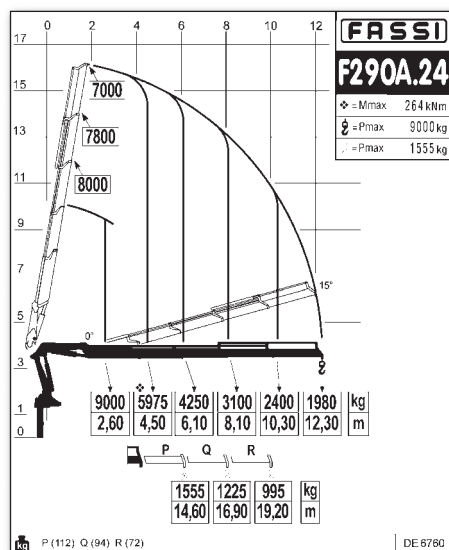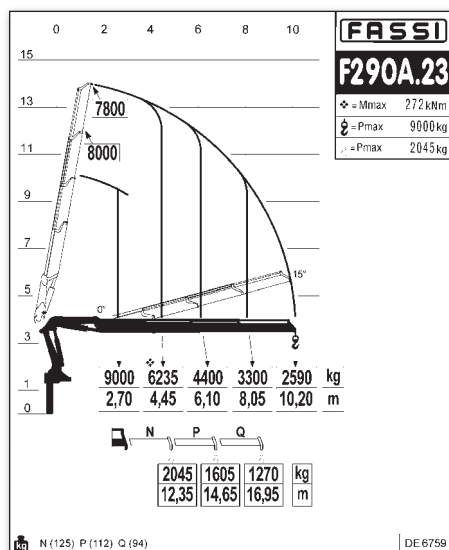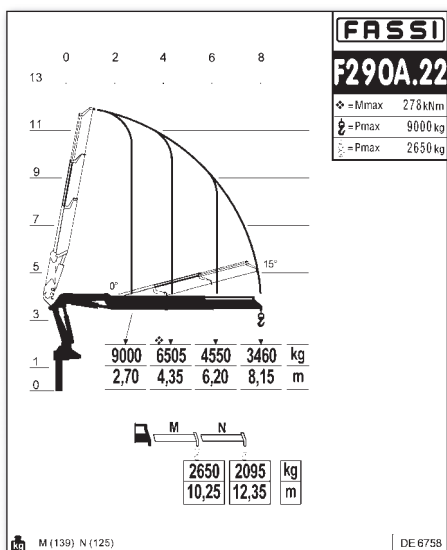

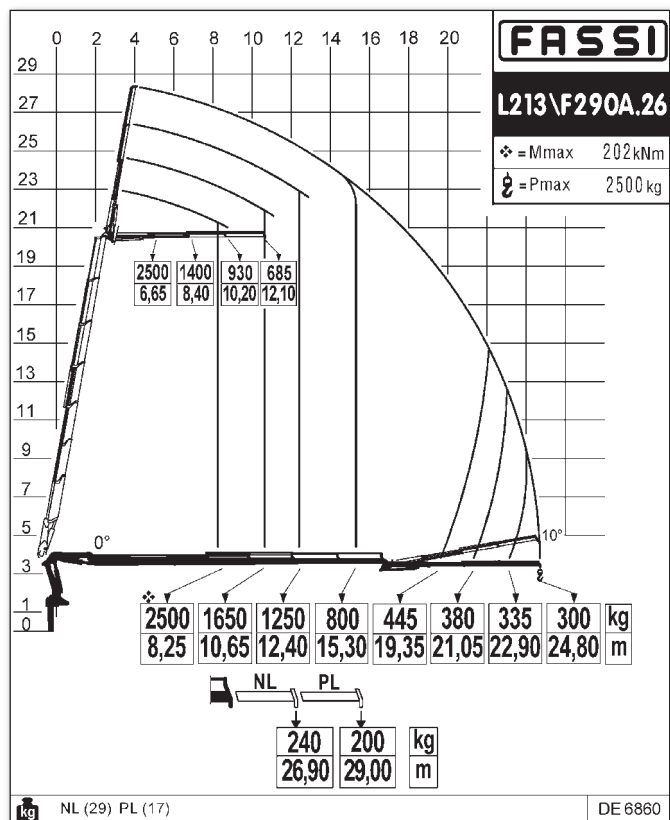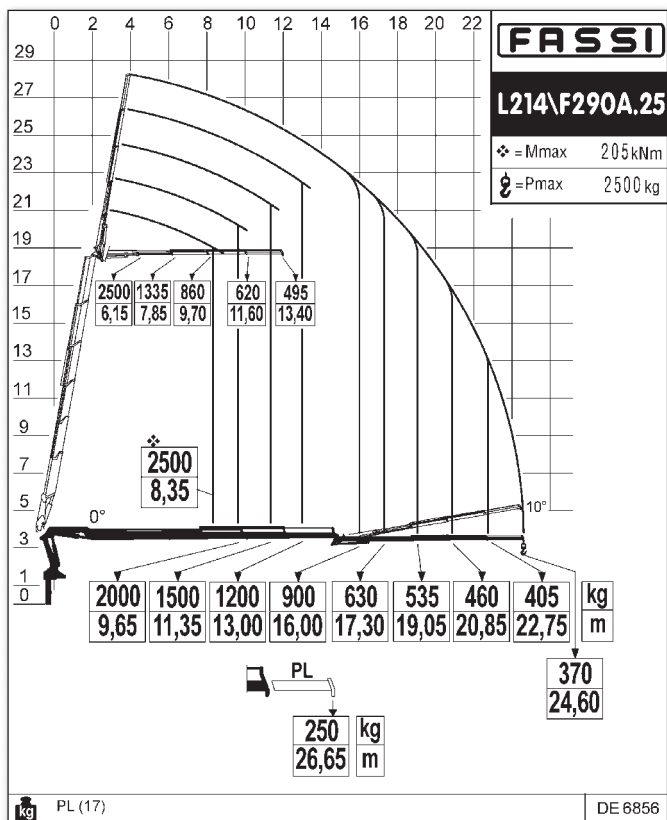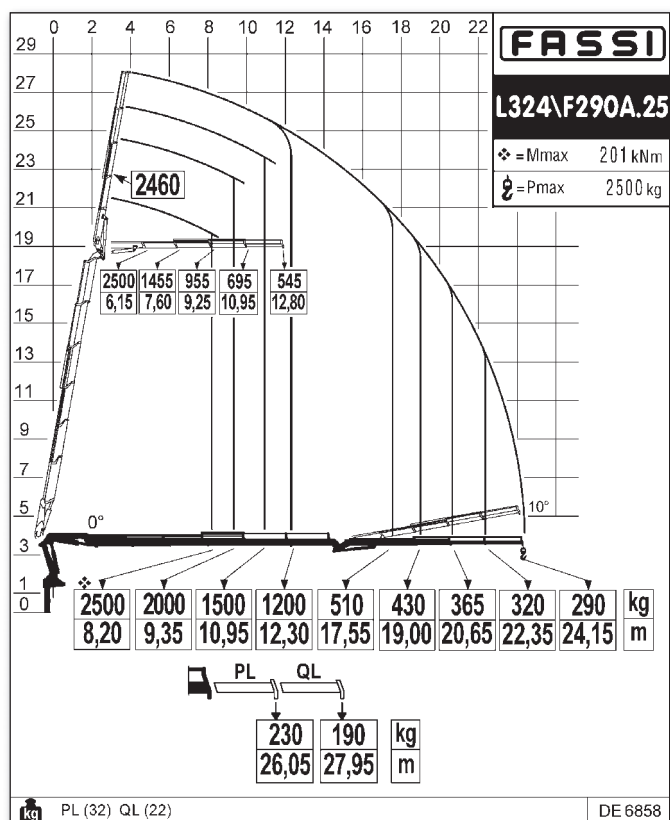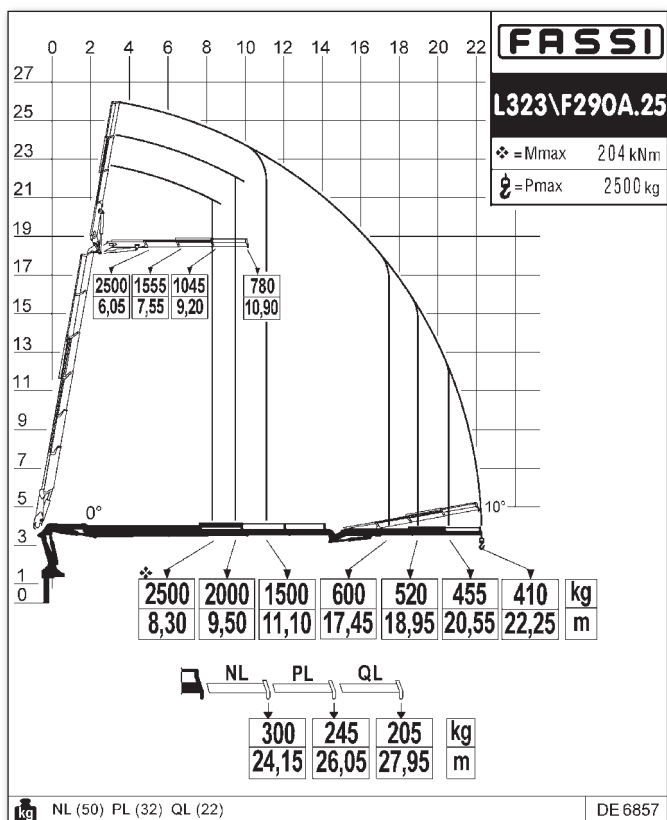

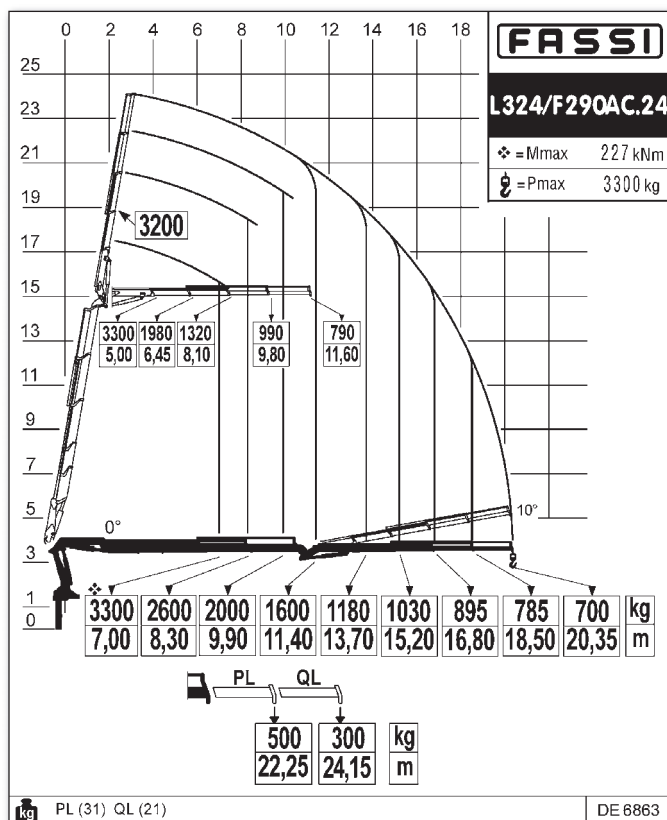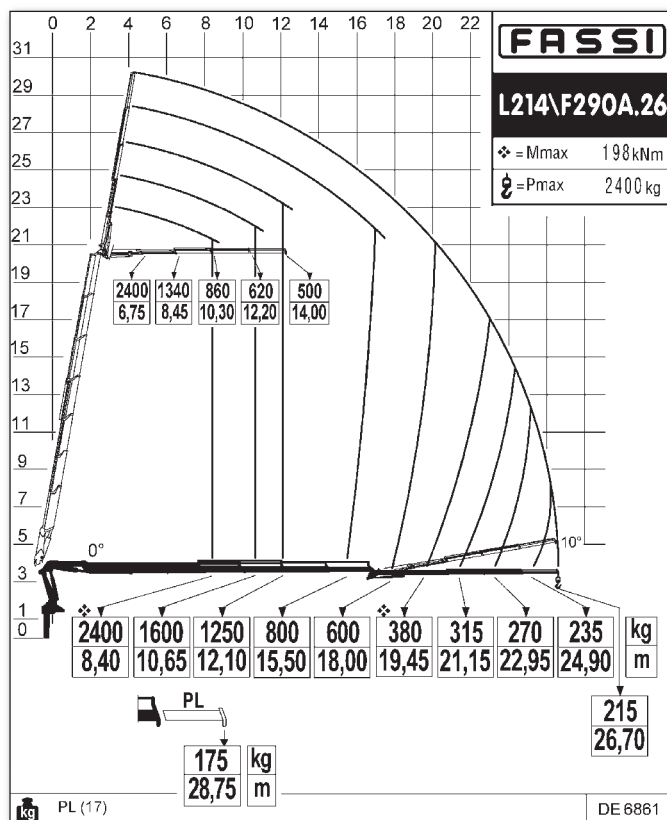

	tm	m	m	°	kNm	Mpa	l/min	l	kg	mm	mm	mm
F290A.22	28,3	8,15	3,80	400	41,0	30,5	60-80	180	3070	2535	1100	2460
F290A.23	27,7	10,20	5,80	400	41,0	30,5	60-80	180	3220	2535	1100	2460
F290A.24	26,9	12,30	7,80	400	41,0	30,5	60-80	180	3465	2535	1100	2460
F290A.25	26,4	14,60	10,00	400	41,0	30,5	60-80	180	3665	2535	1100	2460
F290A.26	25,8	16,70	11,75	400	41,0	30,5	60-80	180	3840	2535	1100	2460
F290A.27	25,3	18,85	14,10	400	41,0	30,5	60-80	180	3980	2535	1175	2460
F290A.28	24,9	20,90	16,15	400	41,0	30,5	60-80	180	4110	2535	1175	2460
F290AC.24	27,3	10,70	7,00	400	41,0	30,5	60-80	180	3365	2535	1100	2460
F290AC.25	27,0	12,95	9,15	400	41,0	30,5	60-80	180	3565	2535	1100	2460
F290AC.26	26,7	15,20	11,20	400	41,0	30,5	60-80	180	3740	2535	1100	2460
F290A.23 L323	27,7	18,05	10,60	400	41,0	30,5	60-80	180	3975	2535	1355	2720
F290A.24 L323	26,8	20,05	12,60	400	41,0	30,5	60-80	180	4480	2535	1355	2720
F290A.24 L324	26,8	22,00	14,40	400	41,0	30,5	60-80	180	4580	2535	1355	2720
F290A.25 L323	26,4	22,25	14,80	400	41,0	30,5	60-80	180	4705	2535	1355	2720
F290A.25 L324	26,4	24,15	16,60	400	41,0	30,5	60-80	180	4805	2535	1355	2720
F290A.25 L214	26,4	22,80	17,25	400	41,0	30,5	60-80	180	4590	2535	1355	2720
F290A.26 L213	25,8	24,80	17,50	400	41,0	30,5	60-80	180	4675	2535	1355	2755
F290A.26 L214	25,8	26,70	19,30	400	41,0	30,5	60-80	180	4745	2535	1355	2755
F290AC.24 L324	27,3	20,35	13,60	400	41,0	30,5	60-80	180	4480	2535	1355	2720